



LEE HABER, PE
CHIEF SAFETY OFFICER
DIVISION OF TRANSPORTATION SAFETY &
OPERATIONS



STATE ROUTE 126
VENTURA COUNTY TRANSPORTATION COMMISSION
MAY 1, 2026

TODAY'S TOPICS




COLLISION
HISTORY &
FINDINGS

PROJECTS
ALONG SR-126

NEXT STEPS

AREA OF INTEREST

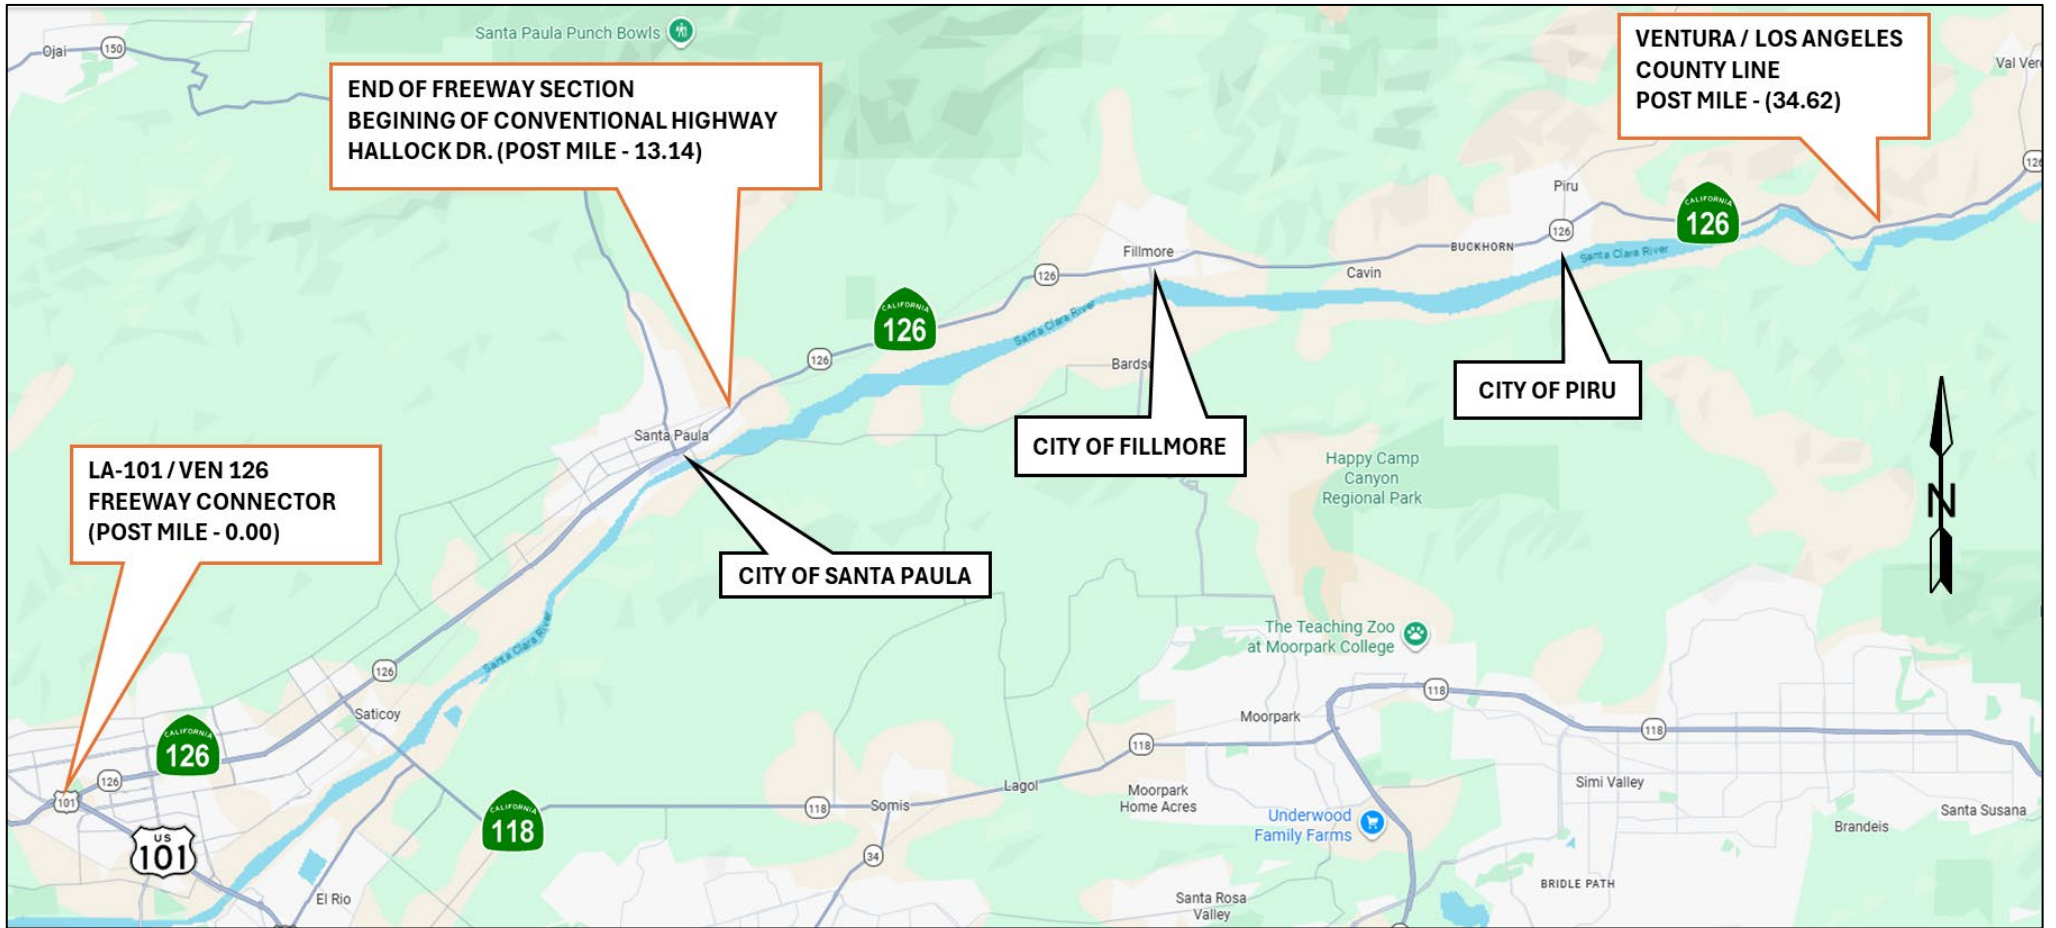


COLLISION DATA

1. DATA: 1/1/2015 THROUGH 12/31/2024
2. 70 CROSS-MEDIAN COLLISIONS → 19 FATALITIES
3. 1339 TOTAL COLLISIONS → 36 FATALITIES
4. COLLISION RATES*

ACTUAL RATES FOR SR-126			STATEWIDE AVERAGES		
FATAL	FATAL + INJURY	TOTAL	FATAL	FATAL + INJURY	TOTAL
0.015	0.24	0.57	0.017	0.57	1.62

*per 100 million miles traveled

CROSS-MEDIAN FATAL COLLISIONS (2015-2025)

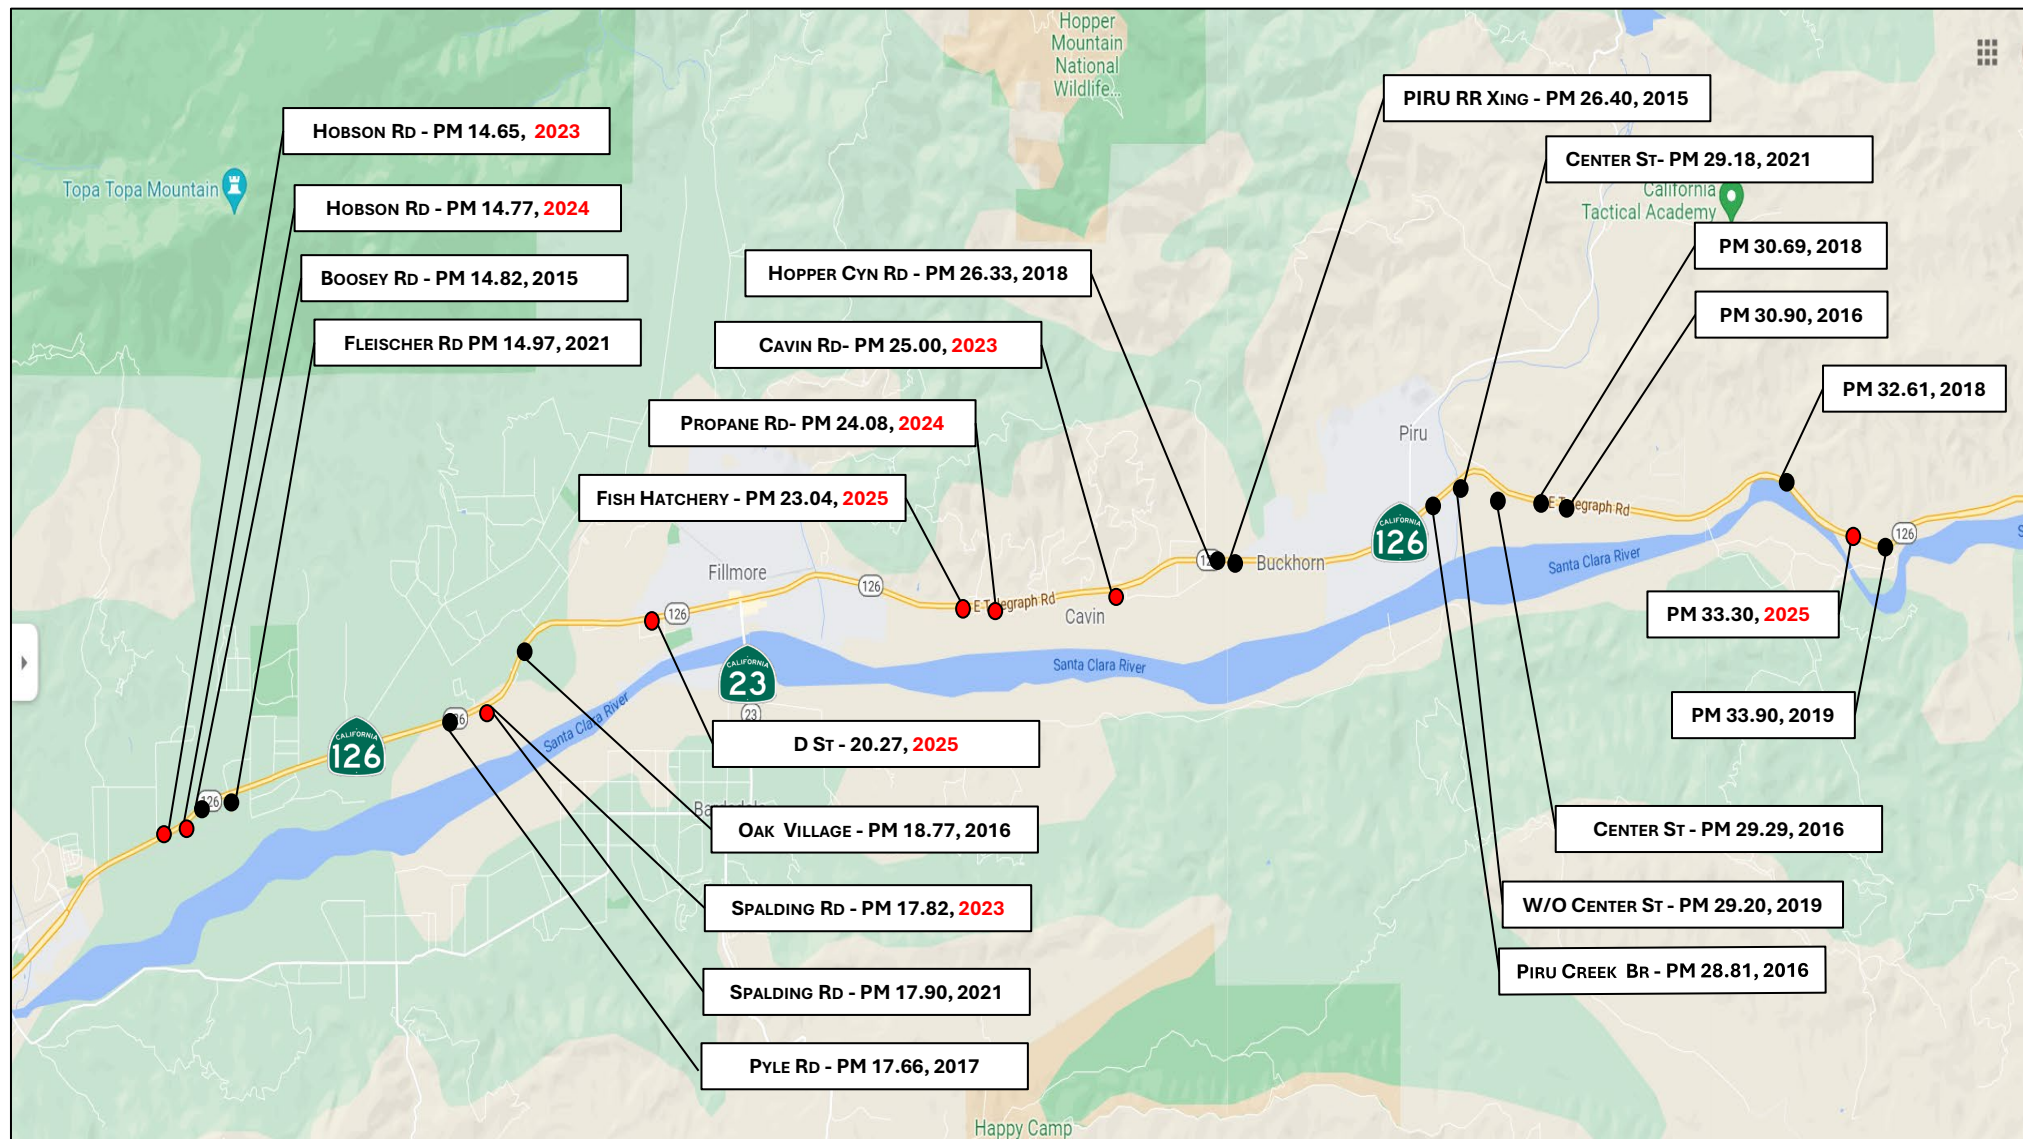

CROSS-MEDIAN COLLISIONS



PRIMARY COLLISION FACTORS



PRIMARY COLLISION FACTORS	QUANTITY	PERCENT (%)
IMPROPER TURN	19	27.1
SPEEDING	17	24.3
INFLUENCE ALCOHOL	15	21.4
OTHER VIOLATIONS	11	15.7
OTHER THAN DRIVER	7	10.0
FAILURE TO YIELD	1	1.4
TOTAL	70	100

CANDIDATES FOR PROGRAMMING



Fillmore City Limits
PM 20.6 to 22.5
SHOPP: Minor B

- Upgrading signals with retro reflective backplates at several intersections within the City of Fillmore
- Anticipated start of Construction: FY 2030/2031

At Fish Hatchery East
PM 23.1
SHOPP: Minor B

- Install chevron signs (curve warning signs) (EB)
- Anticipated start of Construction: FY 2030/2031

Near Haines Canyon Road
PM 23.5
SHOPP: Minor B

- Install raised transverse audible rumble strips
- Anticipated start of Construction: FY 2030/2031

CANDIDATES FOR PROGRAMMING



Near Cavin Road
PM 24.5-25.1
SHOPP: Minor B

- Install speed feedback sign (EB) and chevron signs
- Anticipated start of Construction: FY 2030/2031

Near Hopper Canyon Road
PM 25.8-26.2
SHOPP: Minor B

- Install speed feedback sign (EB) and chevron signs
- Anticipated start of Construction: FY 2030/2031

Near Howe Road
PM 27.5
SHOPP: Minor B

- Install chevron signs (curve warning signs)
- Anticipated start of Construction: FY 2030/2031

CANDIDATES FOR PROGRAMMING



Near Camulos Railroad
PM 30.5
SHOPP: Minor B

- Install speed feedback sign and raised transverse audible rumble strips
- Anticipated start of Construction: FY 2030/2031

Near Newhall Orchard Road
PM 31.5
SHOPP: Minor B

- Install raised transverse audible rumble strips
- Anticipated start of Construction: FY 2030/2031

Near Pena Ranch Rd
PM 32.2 to 34.4
SHOPP: Minor B

- Install chevron signs, raised transverse audible rumble strips, and speed feedback sign
- Anticipated start of Construction: FY 2030/2031

CANDIDATES FOR PROGRAMMING



Various Locations
PM 30.0 to 34.4
SHOPP: Reactive Safety

- Install median barrier
- \$2.3M (estimated capital & support costs)
- Anticipated start of Construction: FY 2030/2031

Various Locations
PM 22.0 to 34.0
SHOPP: Reactive Safety

- Upgrade existing 6" striping to enhance wet night visibility striping
- \$7.0M (estimated capital & support costs)
- Anticipated start of Construction: FY 2030/2031

Various Locations
PM 22.0 to 34.0
SHOPP: Reactive Safety

- Install horizontal linear reflectors along barrier
- \$1.5M (estimated capital & support costs)
- Anticipated start of Construction: FY 2030/2031

PROJECTS IN THE DESIGN PHASE



In Ventura County,
Santa Paula, and
Unincorporated Areas
PM 0.0 to 13.6
Multi-modal, multi-
objective pavement
rehabilitation project
(EA 37900)

- Pavement rehabilitation on mainline lanes and installation of right shoulder rumble strip as a runoff roadway safety countermeasure while extending the service life of pavement and improving ride quality
- \$37.5M (estimated capital & support costs)
- Anticipated Construction Period: Winter 2028 – Spring 2032

PROJECTS IN CONSTRUCTION



At Hallock Drive
PM 13.1
Encroachment Permit
Oversight Project
(EA 30020)

- New signal installation, travel lane widening due to new housing development encroachment permit at intersection, reconfiguration of bike lane striping
- \$1.6M (estimated capital & support costs)
- Anticipated end of Construction: Spring 2028

At Boosey Road
PM 14.3
SHOPP: CAPM
(EA 35650)

- Update median striping to a TWLTP and guide signs
- \$24,000 (estimated capital & support costs)
- Anticipated end of Construction: Spring 2028

PROJECTS IN CONSTRUCTION




At Fleisher Road
PM 15.0
SHOPP: CAPM
(EA 35650)

- Install chevron curve warning signs in eastbound and westbound directions
- \$4,000 (estimated capital & support costs)
- Anticipated end of Construction: Spring 2028

At Clay Street
PM 21.6
SHOPP: CAPM
(EA 35650)

- Install additional signage for existing bike lane
- \$3,000 (estimated capital & support costs)
- Anticipated end of Construction: Spring 2028

NEXT STEPS

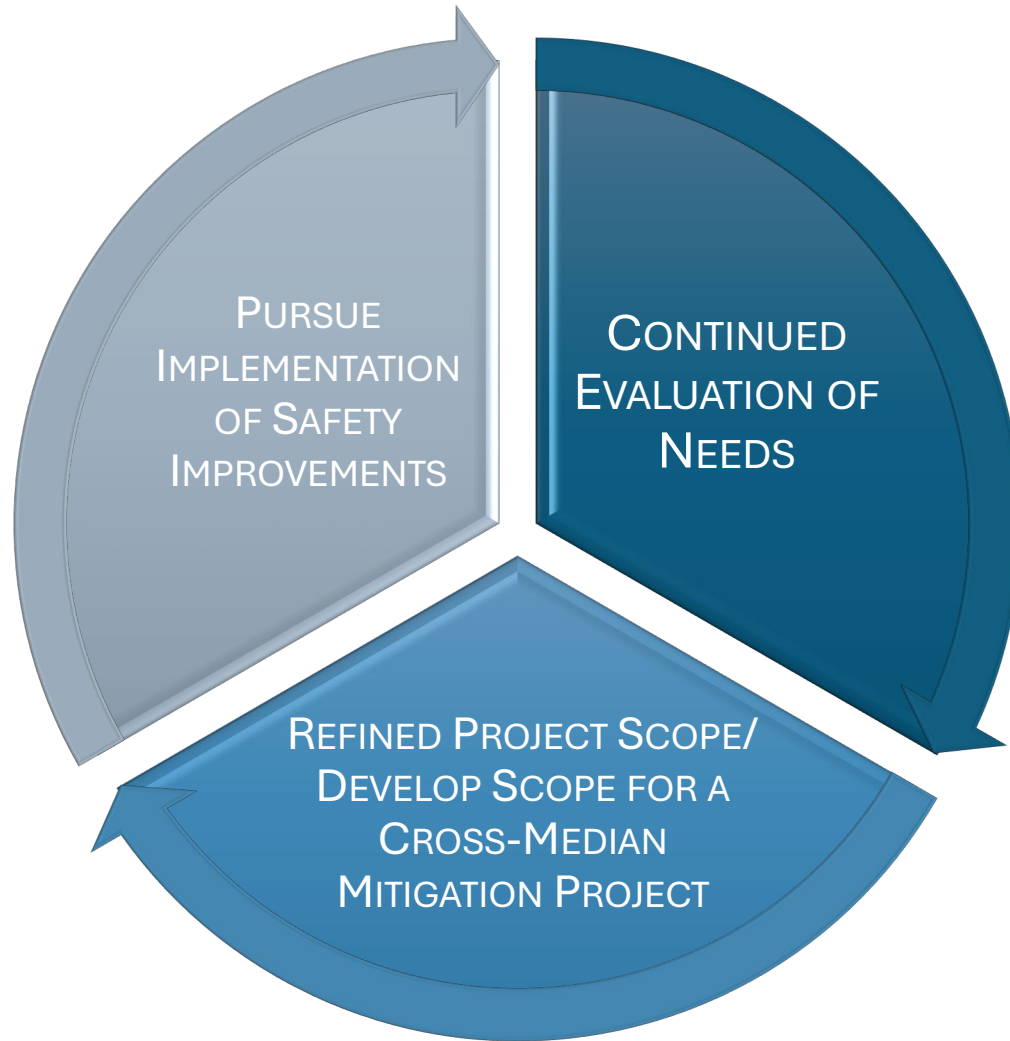



THANK YOU

QUESTIONS?

